

BESTOBELL
AQUATRONIX

SINCE / DEPUIS 1953

BEP-Bestobell

www.bestobell.com



www.fine-tek.com

Guided Wave Radar Level Transmitter



Innovation · Quality · Sharing

PRODUCT INTRODUCTION

OPERATING PRINCIPLE

The guided wave radar level transmitter is a solid and liquid level measuring instrument commonly used in the industry. It transmits electromagnetic pulses along with the steel wire cable or rod ; when these encounter the surface of medium to be measured, the pulses will be partly reflected to form an echo wave and returned to the pulse transmission device along the same path, and the height of liquid level can be calculated.

The guided wave radar level transmitter uses advanced echo wave processing technology with a wide range of product applications that is capable of measuring the low dielectric constant of solid buck; and capable of measuring the solid level, liquid level and medium surface. The product models include coaxial, tube/rod, steel wire cable type for the customer's choice, suitable for high temperature and high pressure medium liquid level measurement.

FEATURES

- Applicable for various measurement requirements of different temperature, pressure and medium.
- Contact measuring, capable of overcoming the steam, foam and stirring effects.
- 4~20 mA / 2 lead wires, simple wiring, low power consumption (2.4W max.).
128*64 LCM Display, easy on-site adjustment.
- Display distance, level, percentage, current 4~20 mA.
- Unique echo wave processing technology can be used under various types of complex work conditions.
- Echo wave graphics display function, to display the signal waveform inside the tank, can be used for background noise processing.
- Operation Interface Language Selection: Traditional Chinese, Simplified Chinese, English. Capable of simulating output current signal of 4mA, 20mA.
- Support save back ground noise function, it could help to eliminate fake echoes.
- Support internal automatic temperature compensation.



TEST STANDARDS

- High voltage :IEC60947-2
- Insulation resistance :IEC60092-504
- Power supply variation :IEC60092-504
- Power supply failure :IEC60092-504
- Electrical burst testing :IEC61000-4-4
- Voltage DIPS :IEC61000-4-11
- Humidity :IEC60068-2-30
- High/Low temperature test :IEC60068-2-38
- IP protection rating :IEC60529

APPLICATION AREAS


- Power plant
- Chemical plant
- Cement plant
- Water treatment
- Paper mill plant
- Steel plant
- Refinery plant

SPECIFICATION

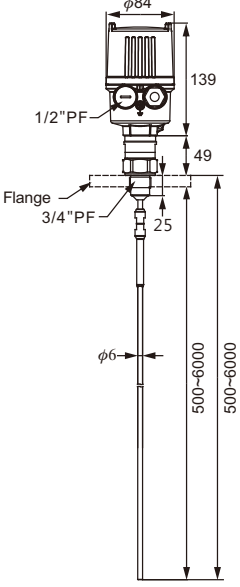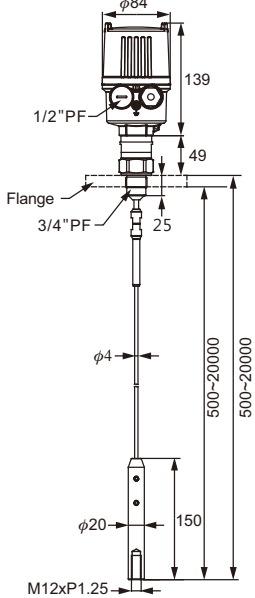Dimensions (Unit: mm)		
Model	JTR301 Standard type	
Medium of the material	Liquid	
Min. Dielectric (constant)	2.0	
Measuring range	6m	20m
Accuracy	$\pm 5\text{mm}$ or $\pm 0.1\%$ F.S. Whichever is greater	
Repeatability	$\pm 3\text{mm}$ or $\pm 0.05\%$ F.S. Whichever is greater	
Ambient temperature	$-40\sim 80^{\circ}\text{C}$ (Applied for Ex-proof, as: ATEX、CSA、IECEx, NEPSI: $-40\sim 60^{\circ}\text{C}$)	
Operating temperature	$-40\sim 150^{\circ}\text{C}$	
Operating pressure	0~60Bar(25°C)	
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire	
Analog output	4~20mA	
Current distinguishability	1.6uA	
Load impedance	$(V_s-16)/0.022$ Ohm for 2-Wire, 300 Ohm for 4-Wire>16V	
Digital communication	HART 7.0 for 2-Wire, RS485(Modbus) for 4-Wire	
Housing material	Aluminum alloy	
Protection rating	IP67	
Version	Rod type	Cable type
Minimum connection	3/4"PF	
Dead band	High constant coefficient ($\varepsilon > 10$) : Upper dead band < 100mm、Lower dead band < 50mm Low constant coefficient ($\varepsilon < 10$) : Upper dead band < 500mm、Lower dead band < 100mm	
Intrinsically safe parameters (option)	ATEX / CSA / IECEx / NEPSI, details please check chapter " Intrinsically safe parameters".	



※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION

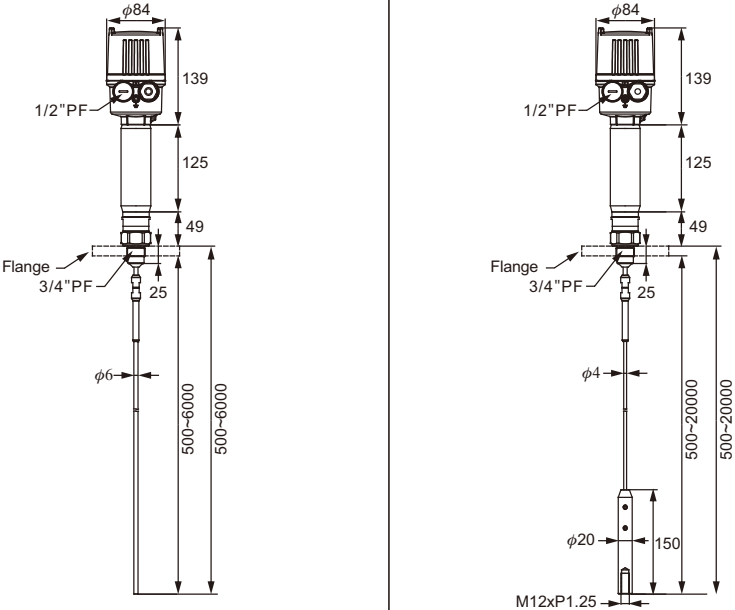Dimensions (Unit: mm)		
Model	JTR301 High temp. type	
Medium of the material	Liquid	
Min. Dielectric (constant)	2.0	
Measuring range	6m	20m
Accuracy	$\pm 5\text{mm}$ or $\pm 0.1\%$ F.S. Whichever is greater	
Repeatability	$\pm 3\text{mm}$ or $\pm 0.05\%$ F.S. Whichever is greater	
Ambient temperature	$-40\sim 80^{\circ}\text{C}$ (Applied for Ex-proof, as: ATEX、CSA、IECEx, NEPSI: $-40\sim 60^{\circ}\text{C}$)	
Operating temperature	$-40\sim 230^{\circ}\text{C}$	
Operating pressure	0~60Bar(25°C)	
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire	
Analog output	4~20mA	
Current distinguishability	1.6uA	
Load impedance	$(V_s-16)/0.022$ Ohm for 2-Wire, 300 Ohm for 4-Wire $>16\text{V}$	
Digital communication	HART 7.0 for 2-Wire, RS485(Modbus) for 4-Wire	
Housing material	Aluminum alloy	
Protection rating	IP67	
Version	Rod type	Cable type
Minimum connection	3/4"PF	
Dead band	High constant coefficient ($\varepsilon > 10$) : Upper dead band $<300\text{mm}$ 、Lower dead band $<50\text{mm}$ Low constant coefficient ($\varepsilon < 10$) : Upper dead band $<500\text{mm}$ 、Lower dead band $<100\text{mm}$	
Intrinsically safe parameters (option)	ATEX / CSA / IECEx / NEPSI , details please check chapter " Intrinsically safe parameters".	



※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION

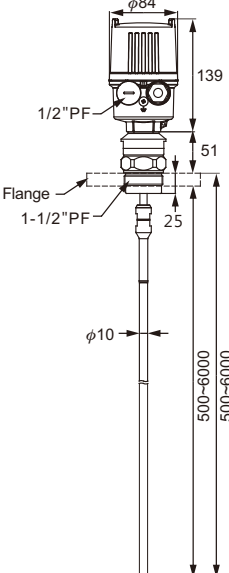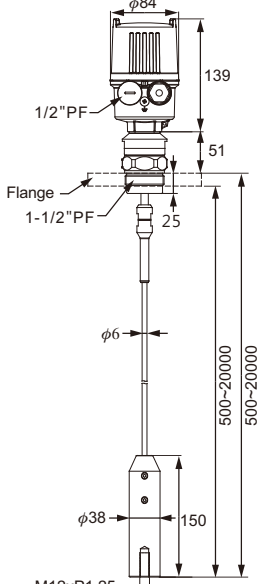Dimensions (Unit: mm)		
Model	JTR302 Standard type	
Medium of the material	Solid	
Min. Dielectric (constant)	2.0	
Measuring range	6m	20m
Accuracy	$\pm 5\text{mm}$ or $\pm 0.1\%$ F.S. Whichever is greater	
Repeatability	$\pm 3\text{mm}$ or $\pm 0.05\%$ F.S. Whichever is greater	
Ambient temperature	$-40\sim 80^{\circ}\text{C}$ (Applied for Ex-proof, as: ATEX、CSA、IECEx, NEPSI: $-40\sim 60^{\circ}\text{C}$)	
Operating temperature	$-40\sim 150^{\circ}\text{C}$	
Operating pressure	0~60Bar(25°C)	
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire	
Analog output	4~20mA	
Current distinguishability	1.6uA	
Load impedance	$(V_s-16)/0.022$ Ohm for 2-Wire, 300 Ohm for 4-Wire>16V	
Digital communication	HART 7.0 for 2-Wire, RS485(Modbus) for 4-Wire	
Housing material	Aluminum alloy	
Protection rating	IP67	
Version	Rod type	Steel wire cable type
Minimum connection	1-1/2"PF	
Dead band	High constant coefficient ($\varepsilon > 10$) : Upper dead band < 100mm、Lower dead band < 50mm Low constant coefficient ($\varepsilon < 10$) : Upper dead band < 500mm、Lower dead band < 100mm	
Intrinsically safe parameters (option)	ATEX / CSA / IECEx / NEPSI, details please check chapter "Intrinsically safe parameters".	



※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION

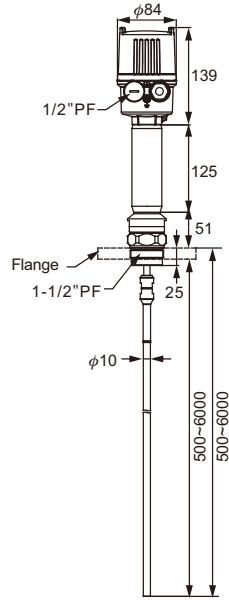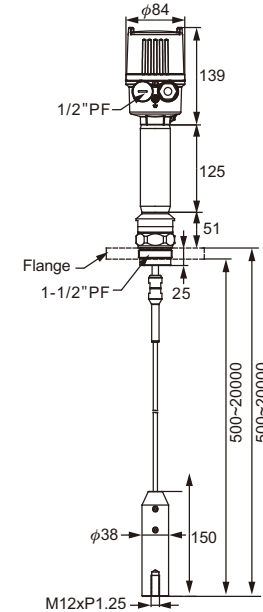Dimensions (Unit: mm)		
Model	JTR302 High temp. type	
Medium of the material	Solid	
Min. Dielectric (constant)	2.0	
Measuring range	6m	20m
Accuracy	$\pm 5\text{mm}$ or $\pm 0.1\%$ F.S. Whichever is greater	
Repeatability	$\pm 3\text{mm}$ or $\pm 0.05\%$ F.S. Whichever is greater	
Ambient temperature	$-40\sim 80^{\circ}\text{C}$ (Applied for Ex-proof, as: ATEX、CSA、IECEx, NEPSI: $-40\sim 60^{\circ}\text{C}$)	
Operating temperature	$-40\sim 230^{\circ}\text{C}$	
Operating pressure	0~60Bar(25°C)	
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire	
Analog output	4~20mA	
Current distinguishability	1.6uA	
Load impedance	$(V_s-16)/0.022$ Ohm for 2-Wire, 300 Ohm for 4-Wire>16V	
Digital communication	HART 7.0 for 2-Wire, RS485(Modbus) for 4-Wire	
Housing material	Aluminum alloy	
Protection rating	IP67	
Version	Rod type	Steel wire cable type
Minimum connection	1-1/2"PF	
Dead band	High constant coefficient ($\varepsilon > 10$) : Upper dead band < 300mm , Lower dead band < 50mm Low constant coefficient ($\varepsilon < 10$) : Upper dead band < 500mm , Lower dead band < 100mm	
Intrinsically safe parameters (option)	ATEX / CSA / IECEx / NEPSI details please check chapter " Intrinsically safe parameters".	


※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION

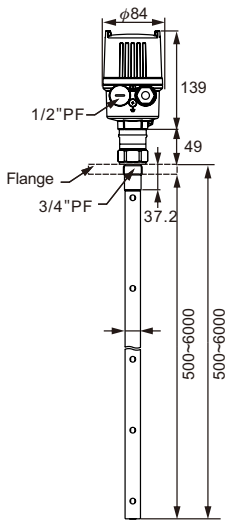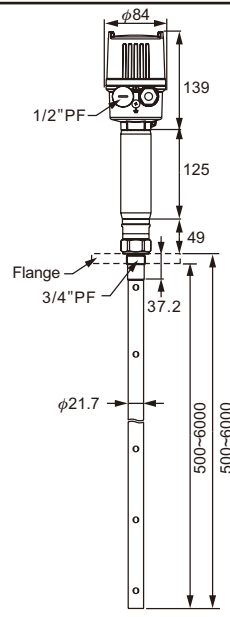Dimensions (Unit: mm)		
Model	JTR305 Standard type	JTR305 High temp. type
Medium of the material	Low Dielectric Liquid	
Min. Dielectric (constant)	1.6	
Measuring range	6m	
Accuracy	$\pm 5\text{mm}$ or $\pm 0.1\%$ F.S. Whichever is greater	
Repeatability	$\pm 3\text{mm}$ or $\pm 0.05\%$ F.S. Whichever is greater	
Ambient temperature	$-40\sim 80^{\circ}\text{C}$ (Applied for Ex-proof, as: ATEX、CSA、IECEx, NEPSI: $-40\sim 60^{\circ}\text{C}$)	
Operating temperature	$-40\sim 150^{\circ}\text{C}$	$-40\sim 230^{\circ}\text{C}$
Operating pressure	0~60Bar(25°C)	
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire	
Analog output	4~20mA	
Current distinguishability	1.6uA	
Load impedance	$(V_s-16)/0.022$ Ohm for 2-Wire, 300 Ohm for 4-Wire>16V	
Digital communication	HART 7.0 for 2-Wire, RS485(Modbus) for 4-Wire	
Housing material	Aluminum alloy	
Protection rating	IP67	
Version	Coaxial type	
Minimum connection	3/4"PF	
Dead band	High constant coefficient ($\varepsilon > 10$) : Upper dead band < 100mm , Lower dead band < 50mm Low constant coefficient ($\varepsilon < 10$) : Upper dead band < 500mm , Lower dead band < 100mm	
Intrinsically safe parameters (option)	ATEX / CSA / IECEx / NEPSI , details please check chapter " Intrinsically safe parameters".	


※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION

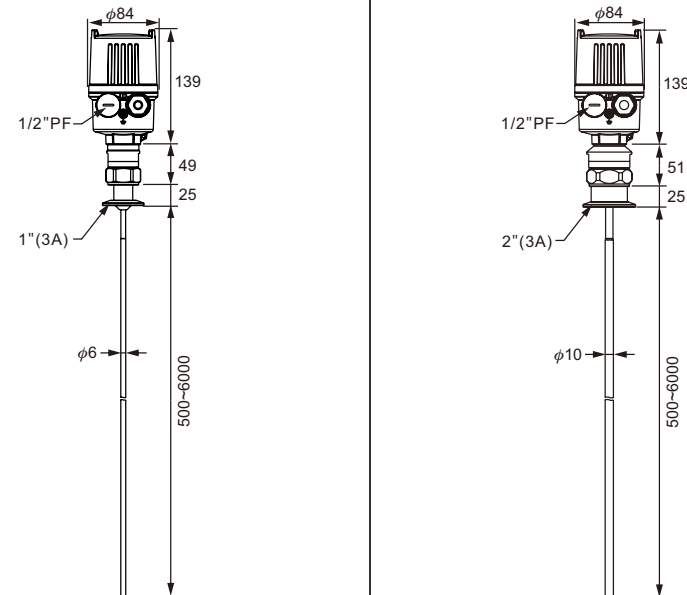Dimensions (Unit: mm)		
Model	JTR30A Sanitary type	
Medium of the material	Liquid	Solid
Min. Dielectric (constant)	1.6	
Measuring range	6m	
Accuracy	$\pm 5\text{mm}$ or $\pm 0.1\%$ F.S. Whichever is greater	
Repeatability	$\pm 3\text{mm}$ or $\pm 0.05\%$ F.S. Whichever is greater	
Ambient temperature	$-40\sim 80^{\circ}\text{C}$ (Applied for Ex-proof, as: ATEX、CSA、IECEx, NEPSI: $-40\sim 60^{\circ}\text{C}$)	
Operating temperature	$-40\sim 150^{\circ}\text{C}$	
Operating pressure	0~60Bar(25°C)	
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire	
Analog output	4~20mA	
Current distinguishability	1.6uA	
Load impedance	$(V_s-16)/0.022$ Ohm for 2-Wire, 300 Ohm for 4-Wire>16V	
Digital communication	HART 7.0 for 2-Wire, RS485(Modbus) for 4-Wire	
Housing material	Aluminum alloy	
Protection rating	IP67	
Version	Rod type	
Minimum connection	1"(3A)	2"(3A)
Dead band	High constant coefficient ($\varepsilon > 10$) : Upper dead band < 100mm , Lower dead band < 50mm Low constant coefficient ($\varepsilon < 10$) : Upper dead band < 500mm , Lower dead band < 100mm	
Intrinsically safe parameters (option)	ATEX / CSA / IECEx / NEPSI , details please check chapter " Intrinsically safe parameters".	

※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

SPECIFICATION

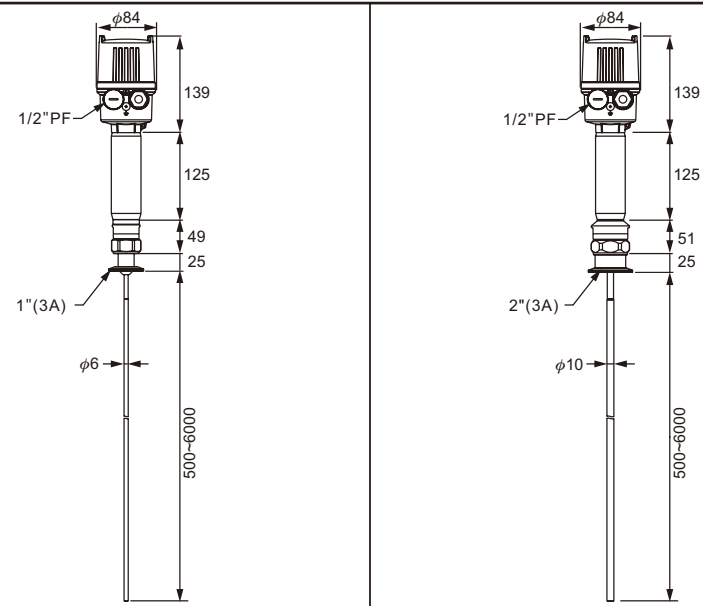Dimensions (Unit: mm)		
Model	JTR30A Sanitary High temp. type	
Medium of the material	Liquid	Solid
Min. Dielectric (constant)	1.6	
Measuring range	6m	
Accuracy	$\pm 5\text{mm}$ or $\pm 0.1\%$ F.S. Whichever is greater	
Repeatability	$\pm 3\text{mm}$ or $\pm 0.05\%$ F.S. Whichever is greater	
Ambient temperature	$-40\sim 80^{\circ}\text{C}$ (Applied for Ex-proof, as: ATEX、CSA、IECEX, EPSI: $-40\sim 60^{\circ}\text{C}$)	
Operating temperature	$-40\sim 230^{\circ}\text{C}$	
Operating pressure	0~60Bar(25°C)	
Power supply	16~30Vdc Loop Power, 16~30Vdc 4-Wire	
Analog output	4~20mA	
Current distinguishability	1.6uA	
Load impedance	$(V_s-16)/0.022$ Ohm for 2-Wire, 300 Ohm for 4-Wire>16V	
Digital communication	HART 7.0 for 2-Wire, RS485(Modbus) for 4-Wire	
Housing material	Aluminum alloy	
Protection rating	IP67	
Version	Rod type	
Minimum connection	1"(3A)	2"(3A)
Dead band	High constant coefficient ($\varepsilon > 10$) : Upper dead band < 300mm , Lower dead band < 50mm Low constant coefficient ($\varepsilon < 10$) : Upper dead band < 500mm , Lower dead band < 100mm	
Intrinsically safe parameters (option)	ATEX / CSA / IECEx / NEPSI , details please check chapter " Intrinsically safe parameters".	

※It shall combine with the ex-proof fence meeting level Ex ia to form the intrinsically safe system.

INTRINSICALLY SAFE PARAMETERS

ATEX, CSA, IECEx, TS:

Model series	Power circuit	Input entity parameters	Output entity parameters
JTR30XD	JLoop power 16~30Vdc X 2 with HART, by 2-core wire via terminal blocks J1 and J2	Loop power 1 In (V1+, V1-): $U_i = 30V$ $I_i = 100\text{ mA}$ $P_i = 0.7W$ $C_i = 0$ $L_i = 0$ Loop Power 2 In (V2+, V2-): Same as above	None
JTR30XB	Loop power 16~30Vdc with HART, by 2-core wire via terminal blocks J1	Loop power In (V+, V-): $U_i = 30V$ $I_i = 100\text{ mA}$ $P_i = 0.7W$ $C_i = 0$ $L_i = 0$	None
JTR30XH	4-Wire 16~30Vdc 4~20mA with RS485, by 2-core wire via terminal blocks J1 and J4 *Note: Feedback signal parameter for 'RS-485 In' is: $U_o = 5.88V$ $I_o = 12.5mA$ $P_o = 18.5mW$ $C_o = 43\mu F$ $L_o = 3555\mu H$	RS-485 In (D+, D-)*: $U_i = 12V$ $I_i = 100mA$ $P_i = 0.3W$ $C_i = 0$ $L_i = 0$ Power In (V+, V-): $U_i = 30V$ $I_i = 100mA$ $P_i = 0.7W$ $C_i = 0$ $L_i = 0$	Analog Out 1 (I+, I-): $U_o = 13.65V$ $I_o = 69mA$ $P_o = 0.236W$ $C_o = 0.79\mu F$ $L_o = 7468\mu H$ Through 2-core wire via terminal block J2 Analog Out 2 (I2+, I2-): $U_o = 13.65V$ $I_o = 69mA$ $P_o = 0.236W$ $C_o = 0.79\mu F$ $L_o = 7468\mu H$ Through 2-core wire via terminal block J3
JTR30XE	4-Wire 16~30Vdc 4~20mA with RS485, by 2-core wire via terminal blocks J1 and J4 *Note: Feedback signal parameter for 'RS-485 In' is: $U_o = 5.88V$ $I_o = 12.5mA$ $P_o = 18.5mW$ $C_o = 43\mu F$ $L_o = 3555\mu H$	RS-485 In (D+, D-)*: $U_i = 12V$ $I_i = 100mA$ $P_i = 0.3W$ $C_i = 0$ $L_i = 0$ Power In (V+, V-): $U_i = 30V$ $I_i = 100mA$ $P_i = 0.7W$ $C_i = 0$ $L_i = 0$	Analog Out 1 (I+, I-): $U_o = 13.65V$ $I_o = 69mA$ $P_o = 0.236W$ $C_o = 0.79\mu F$ $L_o = 7468\mu H$ Through 2-core wire via terminal block J2
JTR30XF	4-Wire 5Vdc with RS485, by 2-core wire via terminal blocks J1 and J4 *Note: Feedback signal parameter for 'RS-485 In' is: $U_o = 5.88V$ $I_o = 12.5mA$ $P_o = 18.5mW$ $C_o = 43\mu F$ $L_o = 3555\mu H$	RS-485 In (D+, D-)*: $U_i = 12V$ $I_i = 100mA$ $P_i = 0.3W$ $C_i = 0$ $L_i = 0$ Power In (V+, V-): $U_i = 10V$ $I_i = 300mA$ $P_i = 0.7W$ $C_i = 0$ $L_i = 0$	None

MEASURING RANGE

NEPSI:

Terminal Code (Power)	Max. Voltage Input U_i (V)	Max. Current Input I_i (mA)	Max. Power Input P_i (W)	Max. Internal equivalent parameter	
				C_i (μ F)	L_i (mH)
V1+ · V1- V2+ · V2-	30	100	0.7	0	0
V+ · V-	30	100	0.7	0	0
	10	300			

Terminal Code (RS485)	Max. Voltage Input U_i (V)	Max. Current Input I_i (mA)	Max. Power Input P_i (W)	Max. Internal equivalent parameter	
				C_i (μ F)	L_i (mH)
D+ · D-	12	100	0.3	0	0
	Max. Voltage Output U_o (V)	Max. Current Output I_o (mA)	Max. Power Output P_o (mW)	Max. External Parameter	
	7	15	25	C_o (μ F)	L_o (mH)
				See below	

Terminal Code (AO)	Max. Voltage Input U_i (V)	Max. Current Input I_i (mA)	Max. Power Input P_i (W)	Max. Internal equivalent parameter	
				C_i (μ F)	L_i (mH)
I+ · I- I2+ · I2-	15	70	0.25	0	0
	Max. Voltage Output U_o (V)	Max. Current Output I_o (mA)	Max. Power Output P_o (mW)	Max. External parameter	
	14	70	0.25	C_o (μ F)	L_o (mH)
				See below	

Terminal Code	Total	
	C_o (μ F)	L_o (mH)
D+ · D- I+ · I- I2+ · I2-	0.5	1.0

MEASURING RANGE


JTR301 / JTR305				
Dielectric constant (ϵ_r)	Typical liquids	Steel wire cable type	Rod type	Coaxial type
1.6~2.0	● Liquefied gas, e.g. propane ● Solvent ● Freon ● Palm oil	Need special model with S5 type float		6m
2.0~2.5	● Mineral oils, fuels	12m	6m	6m
2.5~4.0	● Benzene, styrene, toluene ● Furan ● Naphthalene	14m	6m	6m
4.0~7.0	● Chlorobenzene, chloroform ● Cellulose spray ● Isocyanate, aniline	16m	6m	6m
> 7.0	● Aqueous solutions ● Alcohols ● Ammonia	20m	6m	6m

JTR302			
Dielectric constant (ϵ_r)	Typical liquids	Steel wire cable type	Rod type
2.0~2.5	● Portland cement ● Plaster ● Plastic granulate	12m	6m
2.5~4.0	● Grain, seeds ● Flour ● Ground stones ● Sand	14m	6m
4.0~7.0	● Naturally moist stones, ores ● Salt	16m	6m
> 7.0	● Metallic powder ● Carbon black ● Coal	20m	6m

FUNCTIONAL PRINCIPLE


LIQUID LEVEL MEASUREMENT

High frequency microwave pulses travel along the steel wire cable or tube/rod. When they reach the medium surface, the microwave pulses are reflected. The pulse operating time is calculated and outputted by the electronic instrument of this meter as the liquid level height.

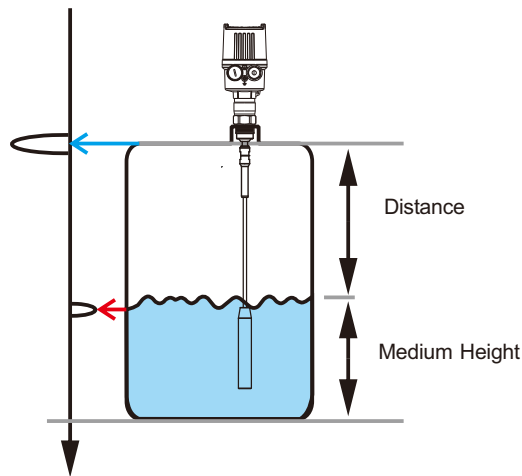

BLIND AREA

The bench-mark of the measuring range is the thread or flange contact surface of the sensor. It should be noted that the measuring range is below the reference plane to the bottom of the induction rod and the upper and lower blind areas that cannot be measured. The default value, measuring range of this meter is set up with "water" as the test medium.

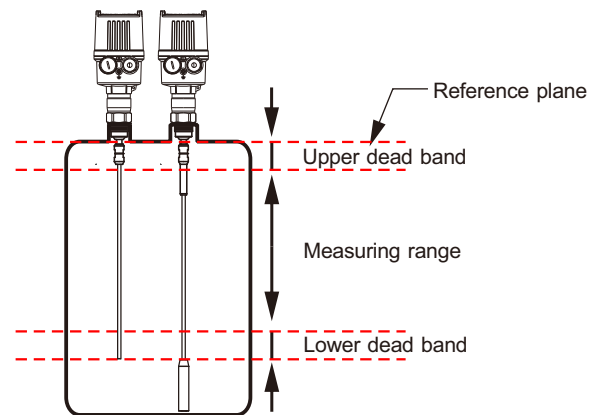

BOTTOM SIGNAL ENHANCEMENT & TRACKING TECHNOLOGY

This sensor is equipped with bottom sensing detection tracking mode, when the measured medium has a low dielectric constant, in order to increase the sensitivity. This feature is useful such as in the plastic particles, packing chips or in liquefied containers. When the dielectric constant is between 3 and 10, as long as the echo wave signal cannot be detected, the bottom sensing detection tracking function will be automatically activated.

The calculation of the measured value uses the dielectric constant last recorded; the accuracy of the meter depends on the stability of the dielectric constant.


If the medium's dielectric constant is less than 3, the bottom sensing detection tracking function is automatically activated throughout the process. The medium's dielectric constant must be input as a stable dielectric constant is important in the measurement.

※ Please refer to product manual for details of setting.

FUNCTIONAL PRINCIPLE

DUAL LIQUID LEVEL INTERFACE MEASUREMENT

High frequency microwave pulses travel along the steel wire cable or tube/rod. When they reach the medium surface, part of the microwave pulses are reflected. The other part penetrates through the upper layer of medium and generates the second reflection at the interface between upper and lower layers of the medium. Two pulse operating time periods are calculated and outputted by the electronic instrument of this meter as the dual liquid level heights.

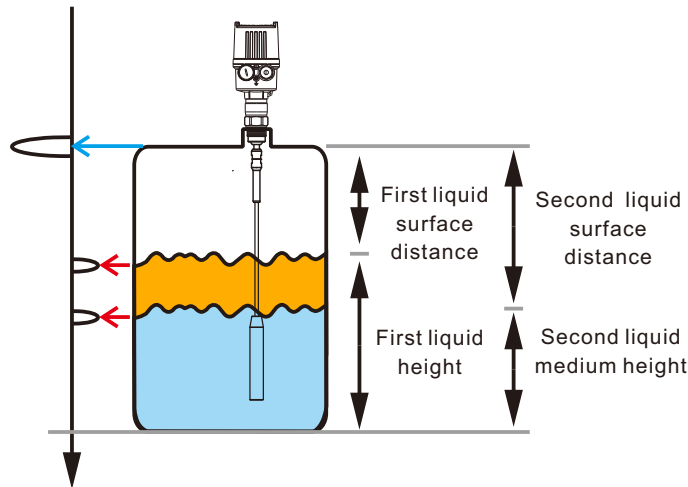

Dual Liquid Level Interface Measuring Condition:

Upper layer medium (L2):

The upper layer medium must be nonconductive dielectric; the dielectric constant of upper layer medium or the actual distance to interface must be known; the dielectric constant of the upper layer medium needs to be greater than 1.6.

The upper layer medium must be stable and the medium cannot be changed or mixed; the upper layer medium must be uniform, and the minimum thickness of the upper layer medium without layering shall be greater than 50 mm (1.97 inches) and clearly separated between the upper layer and lower layer mediums. If there is emulsion phase or debris layer, the maximum thickness shall not be greater than 50 mm (1.97 inches), better measuring results can be achieved without foam on the surface if possible.

Lower layer medium (L1):

The dielectric constant of lower layer must be 10 greater than the dielectric constant of lower layer, preferably conductive medium.

For example, if the dielectric constant of upper layer is 2, the dielectric constant of lower layer shall be at least 12.

Gas layer (L3):

This layer is the mixture of air or gas

Dual Liquid Level Interface Measurement output signal setting:

The meter shall be set up for using in "Separate layers interface measurement", used in interface measurement of two types of liquid, dual analog output version can be selected and adjusted in the setting menu.

INSTALLATION INFORMATION

Please note that when installing the JTR3 series product in a metal container, the spacing from the other devices in the container shall be at least 300 mm (12 in).

When installing in a non-metal container, the spacing from the container wall shall be at least 500 mm (19.7 in).


It is necessary to ensure the probe must not touch any device or tank wall during operation.

It is recommended to fix the bottom of the probe in the tank to reduce the probe shaking when using steel wire cable type induction probe.

Please note that this instrument has upper and lower blind areas that it is disable to measure the full end of probe..


When the welding operation is required during the installation process, please remove the electronic module of the sensor from the terminal box before starting the welding work to avoid damage to the electronic equipment due to induction coupling or other failures.

When used in plastic/glass containers, it is necessary to use the meter type with flange or place a piece of metal plate ($\phi > 200\text{mm}$ / 8in) under the processing connection when mounted. The metal plate shall be directly contacted with the processing connection.

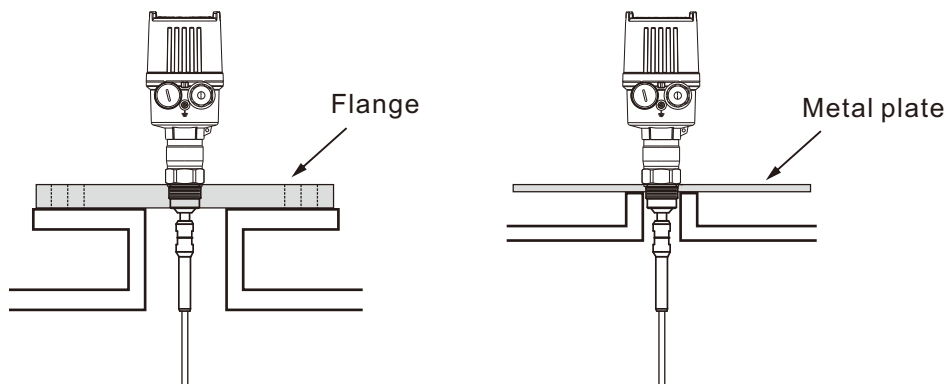

During installation, please avoid using the extended nozzle on the container. Please install the sensor leveled with the top of the container as possible. If this cannot be done, please use a shorter extended nozzle.


Please do not install this instrument at the inlet to ensure that the sensor is in a stable position in the medium and not in the inflow position of the liquid to avoid false measurements when the liquid flows in.

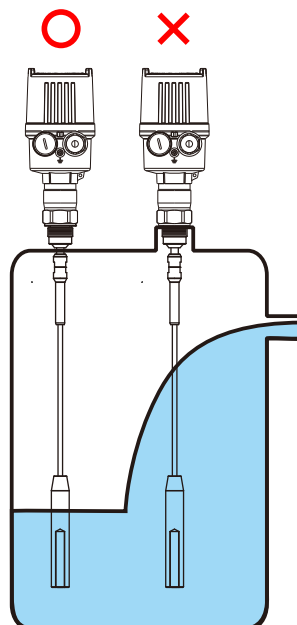


WIRING DIAGRAM

2-wire type

JTR30XD series

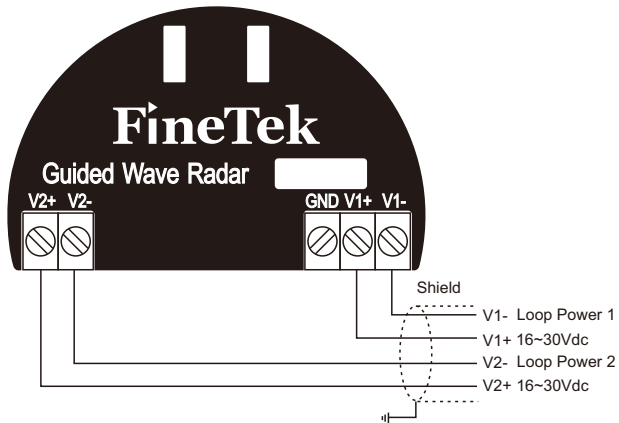


JTR30XB series

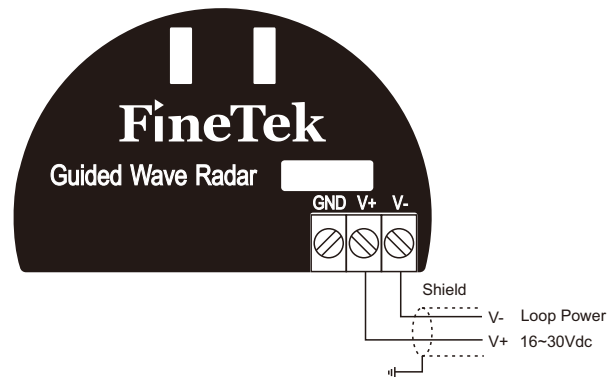


Note! For 2-wire loop power type: when equipped with two sets of analog outputs, each circuit should be operated independently. Parallel connection of the two circuits will cause abnormal current output.

4-Wire type


JTR30XH series

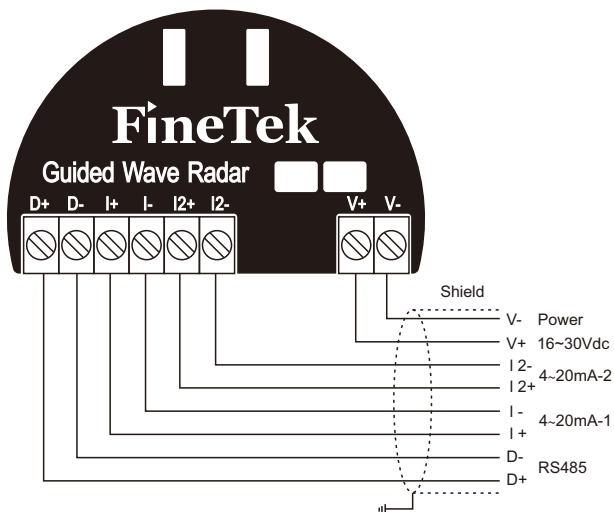

JTR30XE series

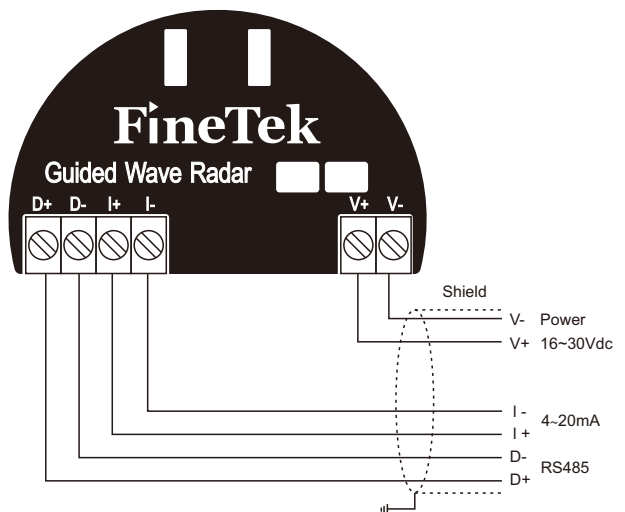

JTR30XF series

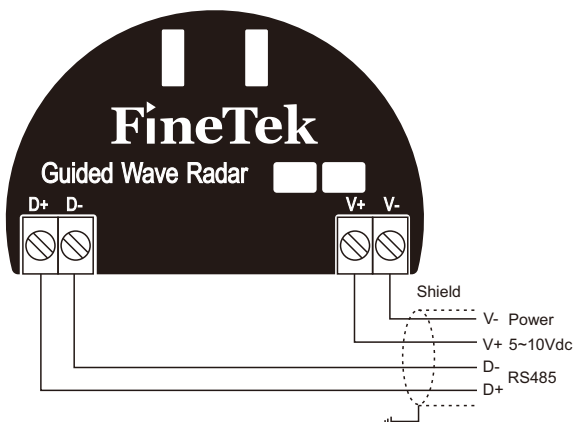


THE EXAMPLE FOR WORKING WITH SAFETY BARRIER:

Digital signal

JTR30XE series


TXX200□□

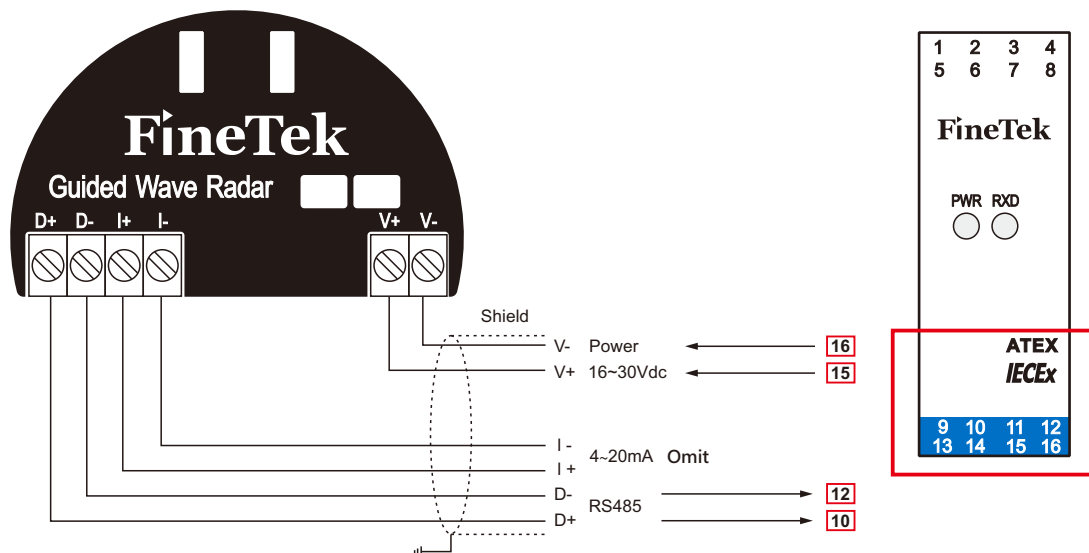

Analog signal


JTR30XD series(Loop power)

TXX200□□

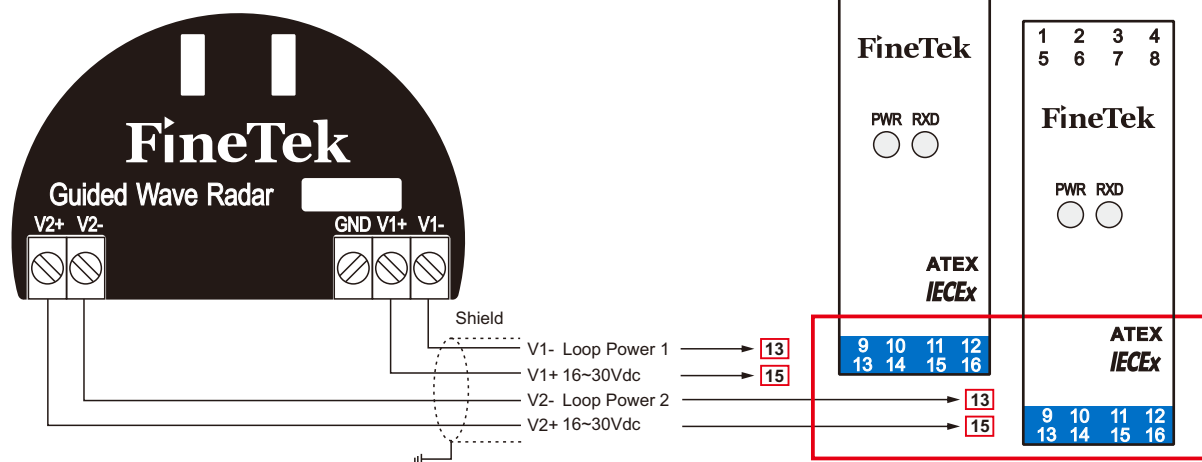

JTR30XB series(Loop power)

TXX200□□

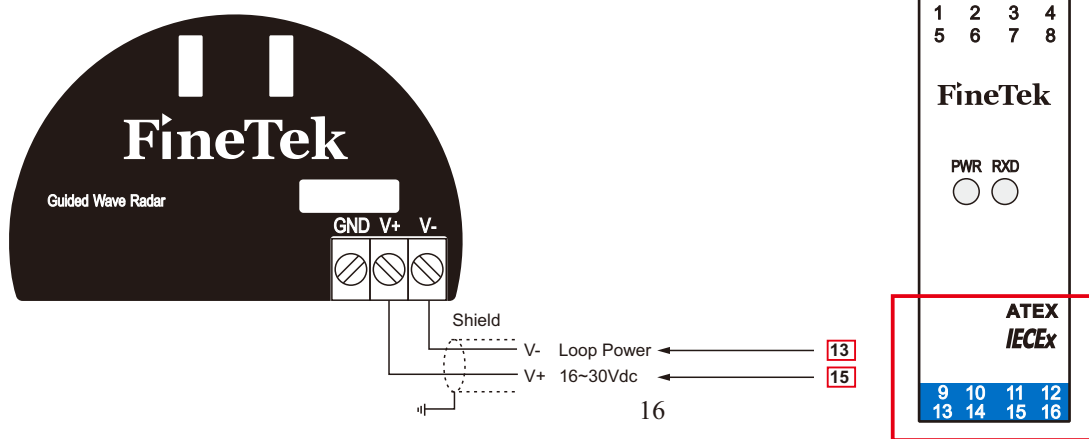

MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
JTR301	JTR1□□□□-A1 JTR1□□□□-A2
JTR302	JTR1□□□□-B1 JTR1□□□□-B2
JTR305	JTR1□□□□-A3
JTR30A	JTR103□□-E1

ORDERING INFORMATION

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	
JTR1																				
05 06 Model																				
00: Standard																				
02: Hi-temperature																				
03: Sanitary																				
32: Sanitary+ Hi-temperature type																				
07 08 Certification																				
00: None																				
1B: ATEX-Ex ia																				
2B: IECEx-Ex ia																				
6B: CSA																				
7B: NEPSI-Ex ia																				
09 10 Probe Type																				
A1: Rod type for liquid 6mm																				
A2: Steel wire cable type for liquid 4mm																				
A3: Coaxial type 21.7mm																				
B1: Rod type for solid																				
B2: Cable type for solid																				
E1: Sanitary rod																				
11 12 Probe material																				
MA: SUS 304																				
MC: SUS 316L																				
Connection																				
13 14					15 16				17 18											
Flange					A7: 3/4"				00: None											
AJ: JIS-RF					A8: 1"				01: PT male											
AN: ANSI-RF					B1: 1-1/2"				03: PF male											
AR: DIN-RF					B2: 2"				07: NPT male											
AI : 3A					B5: 3"				13: GAS male											
Thread					B7: 4"				40: 5 kg/cm ²											
AA: JIS					E1: DN40				48: 150 Lbs											
AC: ANSI									56: PN 6											
									57: PN10											
									59: PN25											

(Next page)

⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓
JTR1 -

⑲ **Output/input**

B: Loop Power 16 ~ 30 Vdc with HART
 D: Loop Power 16 ~ 30 Vdc X 2 with HART
 E: 4-Wire 16 ~ 30Vdc 4~20mA with RS485
 H: 4-Wire 16 ~ 30Vdc, 4~20mA X2 with Rs485
 F: 5~10 Vdc, only RS485

⑳ ㉑ ㉒ ㉓ **Length**

Code	Probe Length
0500~6000	500~6000mm
0500~A200	500~20000mm

JTR Radar Level Transmitter

Customer Information

Prepared by: _____ Date: _____

Company: _____ Industry: _____

E-mail: _____ Phone Number: _____

Address: _____

Application Information

B.1 Measuring Material Information

Application Description:

Installation Area:	☐ Storage tank	☐ Process tank	☐ Open-air application	
Material Status :	☐ Liquid	☐ Slurry/ Sludge/ Paste	☐ Solid/ Granulate/Grain	☐ Powder
Material Name :		Dielectric Constant	☐ 1.4~1.9	☐ 4.0~10.0
			☐ 2.0~2.5	☐ > 10
			☐ 2.6~4.0	☐ Unknow

B.2 Power Supply

☐ DC : _____ ☐ AC : _____

B.3 Output Signal

Analog : ☐ 4~20 mA-4 Wire ☐ 4~20mA 2-Wire ☐ Other

Digital : ☐ RS-485 ☐ HART ☐ Other

B.4 Measuring range

Measuring range: _____ meters

B.5 Measuring Condition

Operating Temperature

Max: _____ °C Min: _____ °C

Ambient Temperature

Max: _____ °C Min: _____ °C

Operating Pressure

Max: _____ Bar Min: _____ Bar

B.6 Connection



Connection: ☐ Threaded

☐ Flange

Size and Standard: _____

Flange Material: _____

B.7 Tank Information

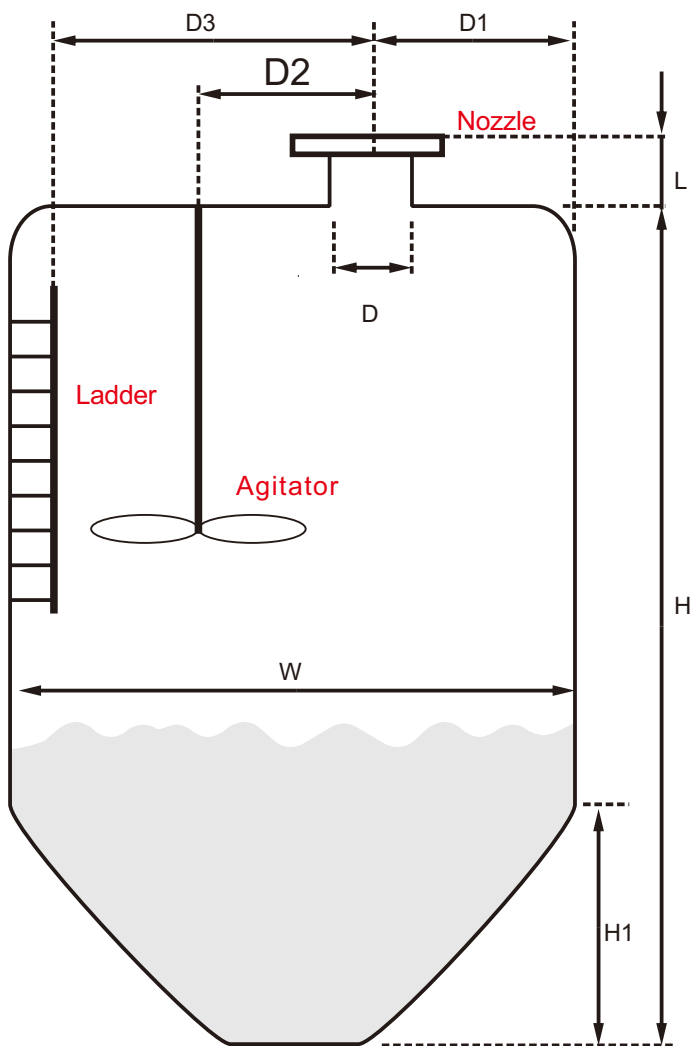Tank Shape	☐ Vertical Cylinder	☐ Horizontal Cylinder	☐ Spherical	
	☐ Cubical/rectangular	☐ Other: _____		
Tank Material	☐ Metal	☐ Plastic	☐ Cement	☐ Other: _____
Tank Bottom	☐ Flat			
	☐ Dish			
	☐ Cone			
	☐ Other (Please describe)	_____ _____		
Tank Tank Height (H): _____ m Tank Diameter (W): _____ m Cone Height (H1): _____ m (Ignore cone height with flat/disk bottom)				
Radar Distance to tank wall(D1): _____ m				
Nozzle ☐ Yes Nozzle Diameter (L): _____ m Nozzle Height (D): _____ m ☐ NO				
Agitator ☐ Yes Distance to rada (D2): _____ m ☐ NO				
Ladder ☐ Yes Distance to rada (D3): _____ m ☐ NO				
Heater ☐ Yes ☐ NO				
Other Internal Obstacles ☐ Yes ☐ NO				

SUCCESS STORY



Water purification barrel



Copper sulfate storage tank



High temperature boiler



Food factory - bean dregs storage barrel

Global Network



Head Quarte

Taiwan

FineTek Co., Ltd. - Taipei Head Quarter

No.16, Tzuchiang St., Tucheng Industrial Park
New Taipei City 236, Taiwan
TEL: 886-2-2269-6789
FAX: 886-2-2268-6682
EMAIL: info@fine-tek.com

Asia

China

Fine automation Co., Ltd. - Shanghai Factory

No.451 DuHui Rd, MinHang District, Shanghai,
China 201109
TEL: 86-21-6490-7260
EMAIL: info.sh@fine-tek.com

Singapore

FineTek Pte Ltd. - Singapore Office

37 Kaki Bukit Place, Level 4 Singapore 416215
TEL: 65-6452-6340
EMAIL: info.sg@fine-tek.com

Indonesia

PT. FineTek Automation Indonesia - Indonesia Office

PERGUDANGAN TUNAS BITUNG
JL. Raya Serang KM. 13,8, Blok C3 No. 12&15, Bitung Cikupa,
Tangerang 15710
TEL: 62 (021)-2958-1688
EMAIL: info.id@fine-tek.com

Europe

Germany

FineTek GmbH - Germany Office

Bei den Kämpen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-12
FAX: +49-(0)4185-8083-80
EMAIL: info@fine-tek.de

Mütec Instruments GmbH - Germany Office

Bei den Kämpen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-0
FAX: +49-(0)4185-8083-80
EMAIL: muetec@muetec.de



Distributor:

BESTOBELL
AQUATRONIX
SINCE DEPUIS 1953

Head Office
2880 Argentia Road, Unit 3
Mississauga, ON L5N 7X8
salesdesk@bestobell.com
1-800-668-3979
www.bestobell.com

Since 1953, Quality Products to Sense, Measure & Control
Depuis 1953, Produits De Qualités Pour Détecter, Mesurer & Contrôler

Montréal Office
970 Montée de Liesse, #204
St.Laurent, QC H4T 1W7
ventes@bestobell.com
1-877-331-1225

Atlantic Office
166 North Side Road
Riverport, NS B0J 2W0
dmossman@bestobell.com
902-529-0355