

DATA SHEET

Brass & Buna-N
Visual Level Indicators

TL4569 Series

BESTOBELL
AQUATRONIX


SINCE / DEPUIS 1953

Madison

For use in remote and mobile storage tanks when no electrical power is available.

Specifications

- Materials: Stem: Brass
Float: Buna-N
- Minimum Media SG: 0.56
- Max. Pressure: 150 psi
- Max. Temperature: 221°F / 105°C
- Mounting: 2" NPT

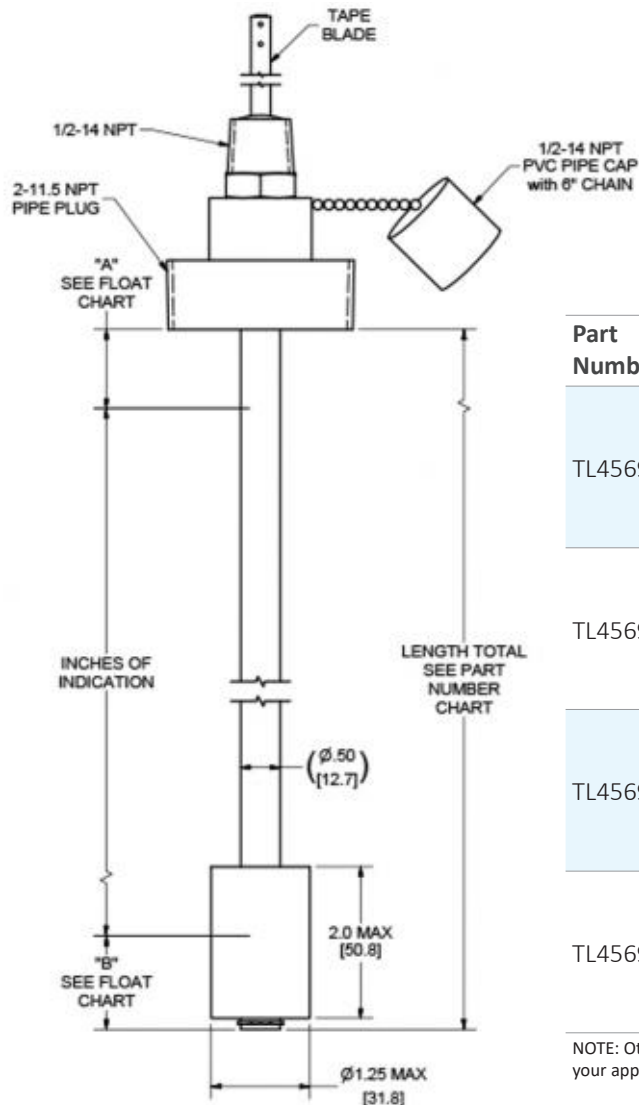

Custom Configurations

Contact us directly
for custom solutions.
Email: salesdesk@bestobell.com

Part Numbers	Total Length	Sensing Length	Tank Size & Orientation
TL4569-10358	17.5"	15.31"	30 gal Horz.
TL4569-10359	22"	19.81"	55 gal Horz.
TL4569-10360	26.5"	24.31"	30 gal Vert.
TL4569-10361	33"	30.81"	55 gal Vert.

NOTE: Other fittings and voltages are available. [Contact us](#) to discuss your application.



Madison

BEP-Bestobell / Bestobell-Aquatronix
2880 Argentia Road, Unit 3
Mississauga, ON, L5N 7X8
Tel. 905-826-1953 / Fax 905-826-1778
www.bestobell.com

DATA SHEET

316 Stainless Steel & Polypropylene
Visual Level Indicators

TL4570 Series

BESTOBELL
AQUATRONIX


SINCE / DEPUIS 1953

Madison

For use in remote and mobile storage tanks when no electrical power is available.

Specifications

- Materials: Stem: 316 Stainless Steel
Float: Polypropylene
- Minimum Media SG: 0.96
- Max. Pressure: 100 psi
- Max. Temperature: 221°F / 105°C
- Mounting: 2" NPT

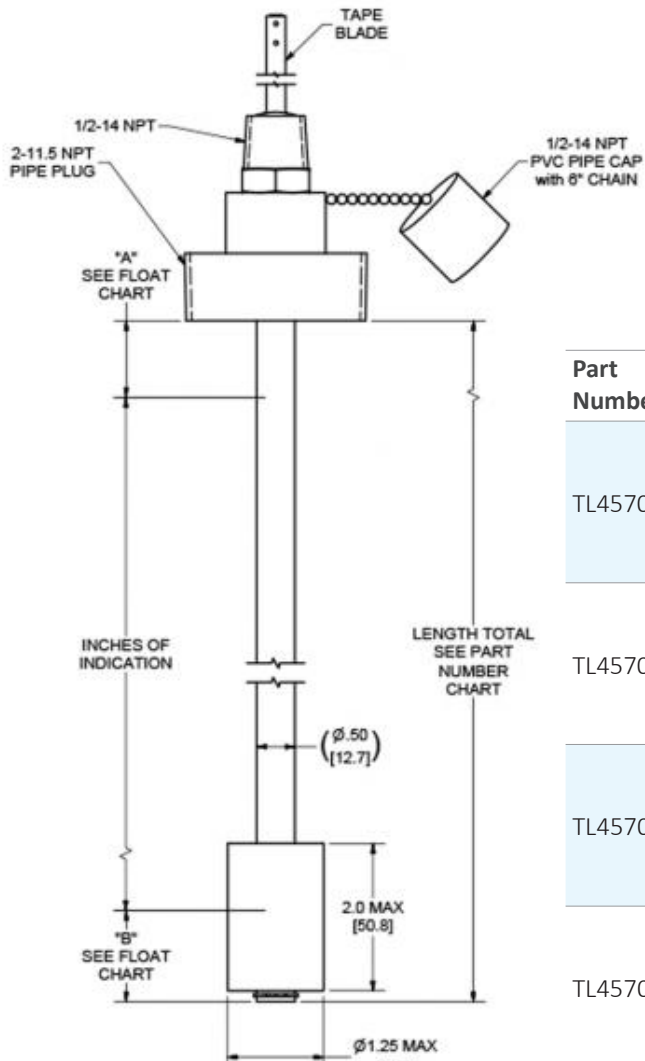

Custom Configurations

Contact us directly
for custom solutions.
Email: salesdesk@bestobell.com

Part Numbers	Total Length	Sensing Length	Tank Size & Orientation
TL4570-10366	17.5"	15.25"	30 gal Horz.
TL4570-10367	22"	19.75"	55 gal Horz.
TL4570-10368	26.5"	24.24"	30 gal Vert.
TL4570-10369	33"	30.75"	55 gal Vert.

NOTE: Other fittings and voltages are available. [Contact us](#) to discuss your application.



Madison

DATA SHEET

316 Stainless Steel & Polypropylene
Visual Level Indicators

TL4570 Series

BESTOBELL
AQUATRONIX


SINCE / DEPUIS 1953

Madison

For use in remote and mobile storage tanks when no electrical power is available.

Specifications

- Materials: Stem: 316 Stainless Steel
Float: Polypropylene
- Minimum Media SG: 0.96
- Max. Pressure: 100 psi
- Max. Temperature: 221°F / 105°C
- Mounting: 2" NPT

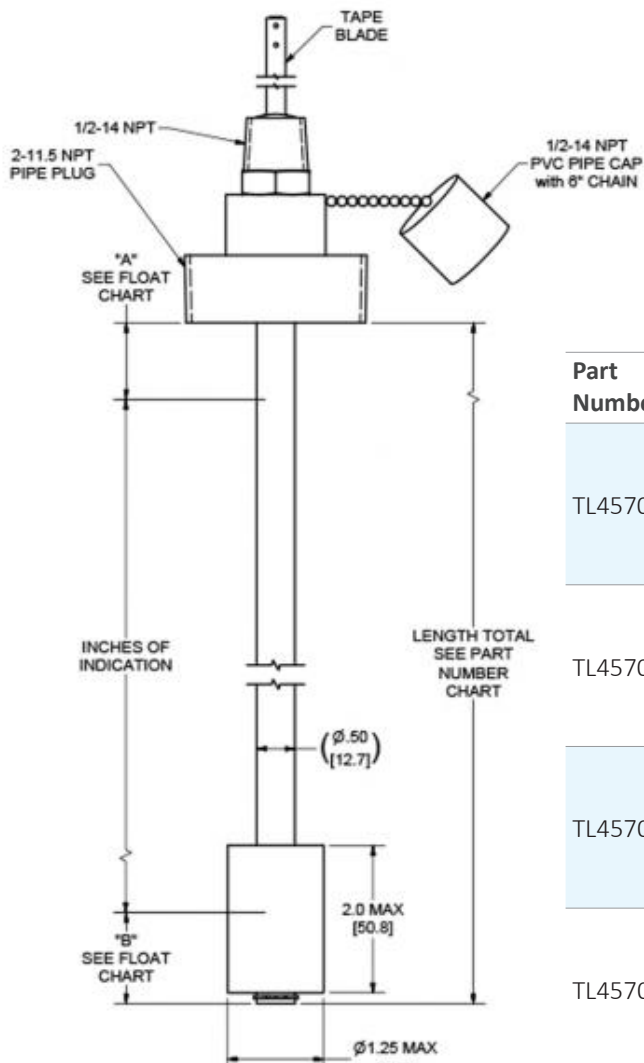

Custom Configurations

Contact us directly
for custom solutions.

Email: salesdesk@bestobell.com

Part Numbers	Total Length	Sensing Length	Tank Size & Orientation
TL4570-10366	17.5"	15.25"	30 gal Horz.
TL4570-10367	22"	19.75"	55 gal Horz.
TL4570-10368	26.5"	24.24"	30 gal Vert.
TL4570-10369	33"	30.75"	55 gal Vert.

NOTE: Other fittings and voltages are available. [Contact us](#) to discuss your application.

Madison

BESTOBELL
AQUATRONIX
SINCE/DEPUIS 1953

Head Office
2880 Argentia Road, Unit 3
Mississauga, ON L5N 7X8
salesdesk@bestobell.com
1-800-668-3979
www.bestobell.com

*Since 1953, Quality Products to Sense, Measure & Control
Depuis 1953, Produits De Qualités Pour Détecter, Mesurer & Contrôler*

Montréal Office
970 Montée de Liesse, #204
St-Laurent, QC H4T 1W7
ventes@bestobell.com
1-877-331-1225

Atlantic Office
166 North Side Road
Riverport, NS B0J 2W0
dmossman@bestobell.com
902-529-0355

